

CSS POLYMERS, INC

**Specializing In Polymer Materials For Concrete
Repair Solutions**



Quick-Repair 15™

**2 Part Hybrid Urethane
Low Viscosity
USDA Approved
Abrasion Resistant
Low Odor
High Tensile Strength**



**Rapid Application & Set Time
No Cupping Or Pulling
Excellent Color Retention
Non-Flammable
Cold Application to -35° F
Low Shrinkage**

Open To Heavy Traffic In 15 Minutes

Use Quick-Repair 15 To Repair Cracks & Spalls; Replace Spalled Control Joints; Concrete Tilt-Up Wall Form Hole Fill-in; Secure Bolts/Equipment & Railings Into Concrete And Many Other Uses.

Outlined Below Are The Steps Involved In Repairing A Concrete Crack With Quick-Repair 15



Clean Crack With Diamond Saw Blade



Prime Crack With Quick-Repair 15




Fill Crack With Silica Sand



Saturate Crack Until Refusal



Polish Repair With Diamond Pad

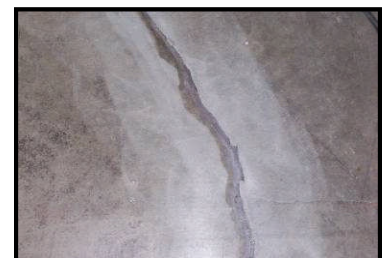

Completed Repair

CSS POLYMERS, INC

**Phone: 877/CSS-POLY (277-7659)
Fax: 866/694-3504
E-mail: info@csspolymersinc.com**

**VISIT US ON THE WEB AT:
www.csspolymersinc.com**